

D-Sign-Light

503/11 Moo 12, Nongprue, Banglamung
20150 Chonburi

Tel: +66-0868438511

Email: info@d-signlight.com

D-Sign-Light Co., Ltd

www.d-signlight.com



D-Sign-Light

Indoor Lighting

LED Spot Light 001/004

LED Down Light 006/015

LED Track Light 016/017

LED Panel Light 018/023

LED Tube Light 024/025

LED Office Ceiling Light 027/030

LED Bulb Light 031/032

LED Bay Light 033/034

LED Step Light 035/036

LED Strip Light 037/038

LED Emergency Light 039/040

Outdoor Lighting

LED Flood Light 041/056

LED Street Light 057/064

LED Underground Light 065/069

LED Underwater Light 070/072

LED Spike Light 073/074

LED Wall Light 075/076

LED Wall Washer 077/081

LED Lawn Light 082/084



Mode:QKSMS-DB-201
Watt:12W
Size:Φ92mm
Commodity:LEDAR30
Voltage:AC90-250V
LED type:SMD 2835
LED brand:Bridgelux
Warranty: 3 years



Mode:QKSMS-DB-202
Watt:12W
Size:
Commodity:LEDAR30
Voltage:AC90-250V
LED type:SMD 2835
LED brand:Bridgelux
Warranty: 3 years



Mode:QKSMS-DB-203
Watt:5W
Size:50xH40mm
Name:MR16 Spot light
Voltage:DC12V
LED type:COB
LED brand:Epistar



Mode: QKSMS-DB-204
Watt:5W
Size:50xH40mm
Name:MR16 Spot light
Voltage:DC12V
LED type:SMD 2835
LED brand:Epistar





Mode:QKSMS-DB-205
Watt:3W Spot Light
Size:50xH40mm
Volt: AC/DC12V/AC85-265V
LED Chip:Osram
Lumen:90LM/W
Basement:MR16/GU10.




Mode:QKSMS-DB-206
Watt:5W Spot Light
Size:50xH40mm
Volt: AC/DC12V/AC85-265V
LED Chip:Osram
Lumen:90LM/W
Basement:MR16/GU10.




LED DOWN LIGHT

- 1.It is simple and good-looking appearance, easy installation;
- 2.high pure aluminum cast and good radiation for heat;
- 3.reflector for vacuum membrane, good light efficacy, strong transparency;
- 4.this applies for imported 5730SMD lamp pearl, even light ray, and high-rate display;
- 5.Widely used in shopping center, hotel, office building and other places, which is optimum substituent for traditional canister-shaped product.

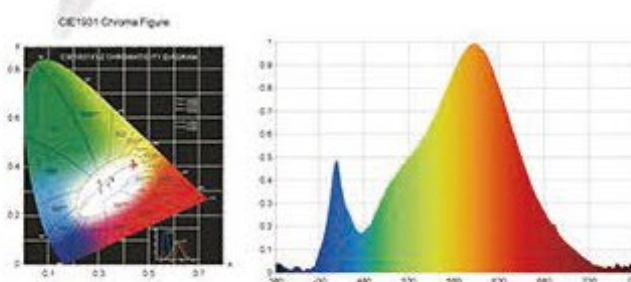

Model	Power	Lamp size	Hole size	Working voltage	LED Chip	Color temperature	Shine angle
QKSMSTHD-A001	3W	Φ65xH45mm	Φ55mm	90-265V	CREE/Epistar	2700-6500K	24° 30° 45°
QKSMSTHD-A002	3W	Φ90xH45mm	Φ75mm	90-265V	CREE/Epistar	2700-6500K	24° 30° 45°
QKSMSTHD-A003	5/7W	Φ110xH45mm	Φ95mm	90-265V	CREE/Epistar	2700-6500K	24° 30° 45°
QKSMSTHD-A004	9/12W	Φ140xH45mm	Φ125mm	90-265V	CREE/Epistar	2700-6500K	24° 30° 45°
QKSMSTHD-A005	15/18W	Φ160xH50mm	Φ145mm	90-265V	CREE/Epistar	2700-6500K	24° 30° 45°

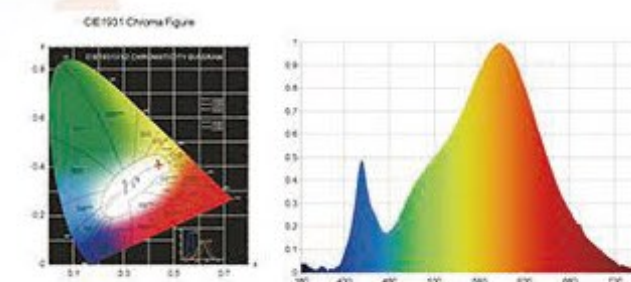



3-5W

5-7W

7-9W

12-15W

Model	Power	Lamp size	Hole size	Working voltage	LED Chip	Color temperature	Shine angle
QKSMSTHD-A006	3W-5W	Φ100x45mm	Φ75mm	90-265V	CREE/Epistar	2700-6500K	15° 24° 30°
QKSMSTHD-A007	5W-7W	Φ110x50mm	Φ85mm	90-265V	CREE/Epistar	2700-6500K	15° 24° 30°
QKSMSTHD-A008	7-9W	Φ120x53mm	Φ95mm	90-265V	CREE/Epistar	2700-6500K	15° 24° 30°
QKSMSTHD-A009	12W-15W	Φ145x55mm	Φ120mm	90-265V	CREE/Epistar	2700-6500K	15° 24° 30°

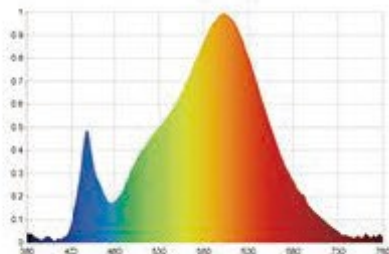

Model	Power	Lamp size	Hole size	Working voltage	LED Chip	Color temperature	Shine angle
QKSMSTHD-A010	1W	Φ68mm	Φ55mm	90-265V	CREE/Epistar	2700-6500K	15° 24° 30°
QKSMSTHD-A011	3W	Φ90mm	Φ75mm	90-265V	CREE/Epistar	2700-6500K	15° 24° 30°
QKSMSTHD-A012	5W	Φ108mm	Φ90mm	90-265V	CREE/Epistar	2700-6500K	15° 24° 30°
QKSMSTHD-A013	9W	Φ138mm	Φ120mm	90-265V	CREE/Epistar	2700-6500K	15° 24° 30°
QKSMSTHD-A014	18W	Φ160mm	Φ140mm	90-265V	CREE/Epistar	2700-6500K	15° 24° 30°



Model	Power	Lamp size	Hole size	Working voltage	LED Chip	Color temperature	Shine angle
QKSMSTHD-A015	5W/7W	Φ100mm	Φ90mm	90-265V	CREE/Epistar	2700-6500K	15° 24° 30°
QKSMSTHD-A016	10W/12W	Φ130mm	Φ120mm	90-265V	CREE/Epistar	2700-6500K	15° 24° 30°
QKSMSTHD-A017	12W/15W	Φ165mm	Φ145mm	90-265V	CREE/Epistar	2700-6500K	15° 24° 30°
QKSMSTHD-A018	15W/20W	Φ190mm	Φ160mm	90-265V	CREE/Epistar	2700-6500K	15° 24° 30°
QKSMSTHD-A019	30W	Φ220mm	Φ205mm	90-265V	CREE/Epistar	2700-6500K	15° 24° 30°



Model	Power	Lamp size	Hole size	Working voltage	LED Chip	Color temperature	Shine angle
QKSMSTHD-A020	3W	Φ100xH56mm	Φ65mm	AC85-265V	CREE/Epistar	2700-6500K	15° 24° 30°
QKSMSTHD-A021	6W	Φ120xH58mm	Φ83mm	AC85-265V	CREE/Epistar	2700-6500K	15° 24° 30°
QKSMSTHD-A022	9W	Φ145xH70mm	Φ102mm	AC85-265V	CREE/Epistar	2700-6500K	15° 24° 30°
QKSMSTHD-A023	12W	Φ175xH82mm	Φ128mm	AC85-265V	CREE/Epistar	2700-6500K	15° 24° 30°



Model	Power	Dimension	Cut-out	Shine angle
QKSMSTHD-A024	COB 1x3/5W	92x92mm	Φ 75x75mm	30° 45° 60°
QKSMSTHD-A025	COB 2x3/5W	175x92mm	Φ 155x75mm	30° 45° 60°
QKSMSTHD-A026	COB 3x3/5W	255x92mm	Φ 235x75mm	30° 45° 60°
QKSMSTHD-A027	COB 1x5/7W	120x120mm	Φ 105x105mm	30° 45° 60°
QKSMSTHD-A028	COB 2x5/7W	230x120mm	Φ 205x105mm	30° 45° 60°
QKSMSTHD-A029	COB 3x5/7W	340x120mm	Φ 325x105mm	30° 45° 60°
QKSMSTHD-A030	COB 1x9/12W	140x140mm	Φ 120x120mm	30° 45° 60°
QKSMSTHD-A031	COB 2x9/12W	270x140mm	Φ 250x120mm	30° 45° 60°
QKSMSTHD-A032	COB 3x9/12W	400x140mm	Φ 380x120mm	30° 45° 60°



Model	Power	Lamp size	Hole size	Working voltage	LED Chip	Color temperature	Shine angle
QKSMSTHD-A033	05W	Φ86xH56mm	Φ75mm	90~265V	CREE/Epistar	2700~6500K	24° 30° 45°
QKSMSTHD-A034	10W	Φ110xH75mm	Φ95mm	90~265V	CREE/Epistar	2700~6500K	24° 30° 45°
QKSMSTHD-A035	15W	Φ140xH84mm	Φ120mm	90~265V	CREE/Epistar	2700~6500K	24° 30° 45°
QKSMSTHD-A036	20W	Φ160xH115mm	Φ140mm	90~265V	CREE/Epistar	2700~6500K	24° 30° 45°




Model	Power	Lamp size	Hole size	Voltage	LED Chip	Color temperature	Shine angle
QKSMSTHD-A037	05/07W	Φ85xH70mm	Φ75mm	90-265V	CREE/Epistar	2700-6500K	24° 30° 45°
QKSMSTHD-A038	10W	Φ120xH90mm	Φ105mm	90-265V	CREE/Epistar	2700-6500K	24° 30° 45°
QKSMSTHD-A039	15W	Φ150xH145mm	Φ140mm	90-265V	CREE/Epistar	2700-6500K	24° 30° 45°
QKSMSTHD-A040	20W	Φ160xH145mm	Φ150mm	90-265V	CREE/Epistar	2700-6500K	24° 30° 45°



Model	Power	Lamp size	Voltage	LED Chip	Color temperature	Shine angle
QKSMSTHD-A041	3/7/10/12W	Φ135x130mm	90-265V	CREE/Epistar	2700-6500K	24° 30° 45°
QKSMSTHD-A042	15/18/20W	Φ170x160mm	90-265V	CREE/Epistar	2700-6500K	24° 30° 45°
QKSMSTHD-A043	20/25W	Φ190x140mm	90-265V	CREE/Epistar	2700-6500K	24° 30° 45°
QKSMSTHD-A044	30W	Φ190x180mm	90-265V	CREE/Epistar	2700-6500K	24° 30° 45°
QKSMSTHD-A045	25/30W	Φ225x140mm	90-265V	CREE/Epistar	2700-6500K	24° 30° 45°
QKSMSTHD-A046	30/50/70W	Φ225x210mm	90-265V	CREE/Epistar	2700-6500K	24° 30° 45°



Model	Power	Lamp size	LED Chip	Color temperature	Shine angle
QKSMSTHD-A047	3W	Φ75*80mm	CREE/Epistar	2700-6500K	24° 30° 45°
QKSMSTHD-A048	5-7W	Φ90*100mm	CREE/Epistar	2700-6500K	24° 30° 45°
QKSMSTHD-A049	9-12W	Φ100*100mm	CREE/Epistar	2700-6500K	24° 30° 45°
QKSMSTHD-A050	15-18W	Φ125*100mm	CREE/Epistar	2700-6500K	24° 30° 45°
QKSMSTHD-A051	12-24W	Φ140*150mm	CREE/Epistar	2700-6500K	24° 30° 45°
QKSMSTHD-A052	COB10-20W	Φ115*125mm	CREE/Epistar	2700-6500K	24° 30° 45°

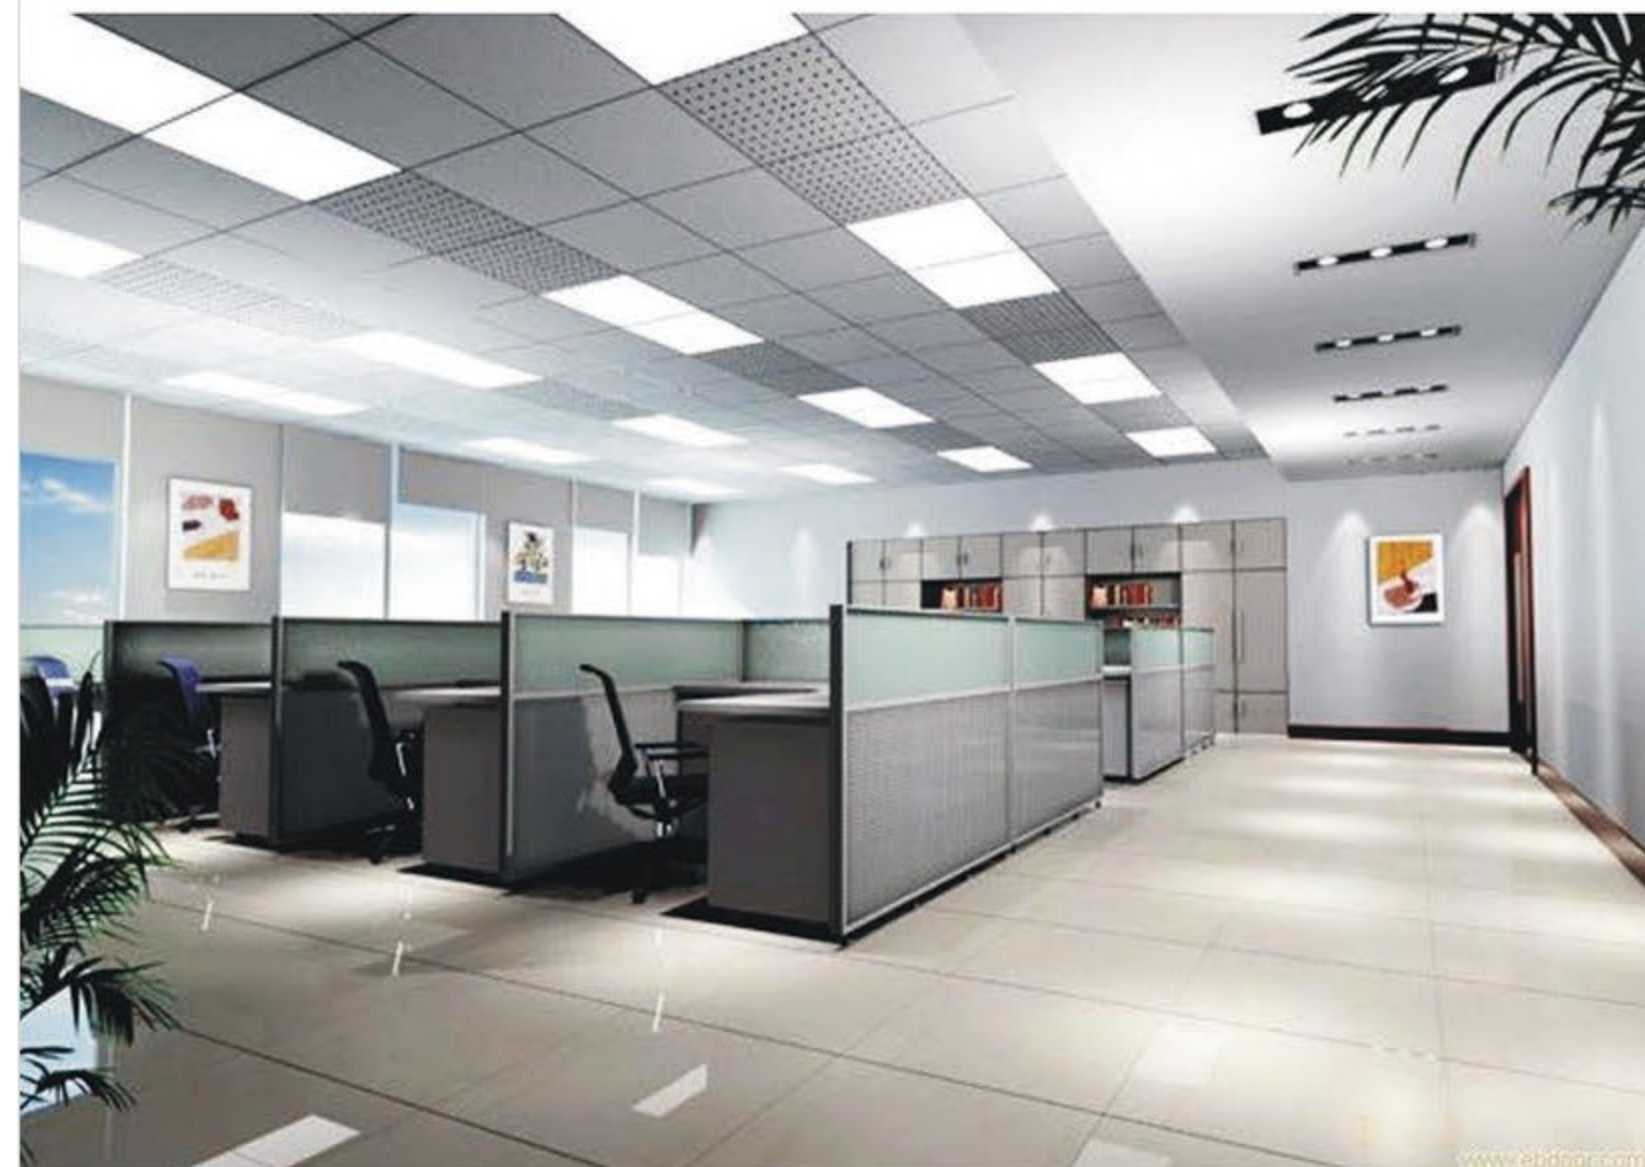

LED Panel Light Series

Scope of application:


LED panel light uses high brightness LED as light source which is suitable for hotel, bar, restaurant, coffee shop, home, office, etc. It can directly replace the common fluorescent lamp and even more bright.



Model	Watt	Voltage (V)	LED Chip	Lumen	CRI	Size(mm)	Warranty
QKSMS-PBD-1001	3W	AC85-265V	Osram/Epistar	100LM/W	>80	Φ85	3 years
QKSMS-PBD-1002	6W	AC85-265V	Osram/Epistar	100LM/W	>80	Φ120	3 years
QKSMS-PBD-1002	9W	AC85-265V	Osram/Epistar	100LM/W	>80	Φ145	3 years
QKSMS-PBD-1003	12W	AC85-265V	Osram/Epistar	100LM/W	>80	Φ170	3 years
QKSMS-PBD-1003	15W	AC85-265V	Osram/Epistar	100LM/W	>80	Φ200	3 years
QKSMS-PBD-1004	18W	AC85-265V	Osram/Epistar	100LM/W	>80	Φ225	3 years




Model	Watt	Voltage (V)	LED Chip	Lumen	CRI	Size(mm)	Warranty
QKSMS-PBD-1014	6W	AC85-265V	Osram/Epistar	100LM/W	>80	Φ120	3 years
QKSMS-PBD-1015	12W	AC85-265V	Osram/Epistar	100LM/W	>80	Φ170	3 years
QKSMS-PBD-1016	18W	AC85-265V	Osram/Epistar	100LM/W	>80	Φ225	3 years
QKSMS-PBD-1017	24W	AC85-265V	Osram/Epistar	100LM/W	>80	Φ300	3 years
QKSMS-PBD-1018	36W	AC85-265V	Osram/Epistar	100LM/W	>80	1200*150	3 years

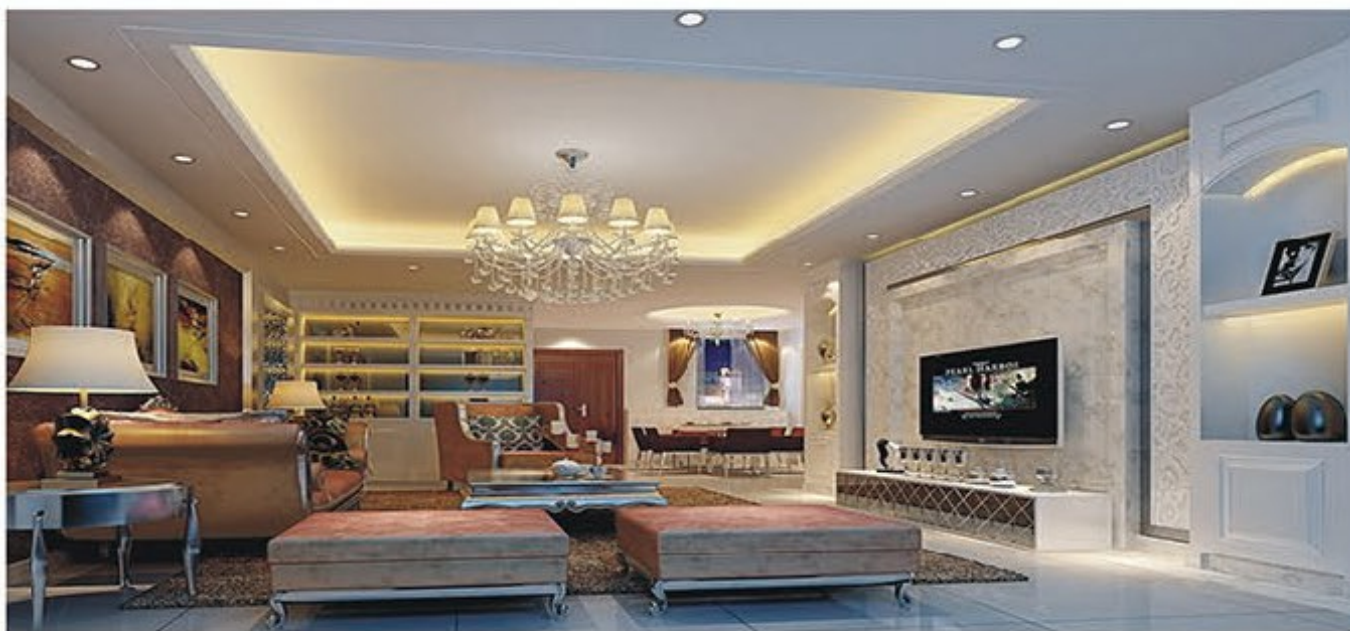

Model	Watt	Voltage (V)	LED Chip	Lumen	CRI	Size(mm)	Warranty
QKSMS-PBD-1022	3+3W	AC85-265V	Osram/Epistar	100LM/W	>80	Φ105	3 years
QKSMS-PBD-1023	6+3W	AC85-265V	Osram/Epistar	100LM/W	>80	Φ145	3 years
QKSMS-PBD-1024	12+4W	AC85-265V	Osram/Epistar	100LM/W	>80	Φ195	3 years
QKSMS-PBD-1025	16+8W	AC85-265V	Osram/Epistar	100LM/W	>80	Φ245	3 years



Model	Watt	Voltage (V)	LED Chip	Lumen	CRI	Size(mm)	Warranty
QKSMS-PBD-1006	36/40/48/56/72W	AC85-265V	CREE/Epistar	90-100LM/W	>80	600*600*10	3 years
QKSMS-PBD-1007	36/40/48/56/72W	AC85-265V	CREE/Epistar	90-100LM/W	>80	300*1200*10	3 years
QKSMS-PBD-1008	56/72W	AC85-265V	CREE/Epistar	90-100LM/W	>80	600*1200*10	3 years

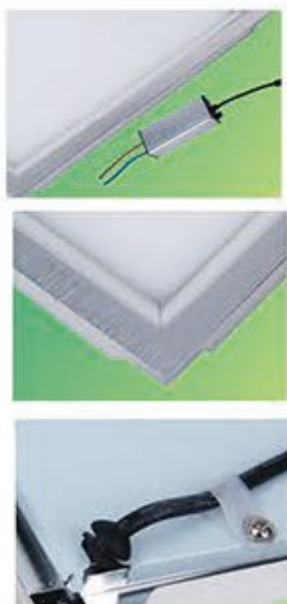

Model	Watt	Voltage (V)	LED Chip	Lumen	Driver	CRI	Size(mm)	Warranty
QKSMS-PBD-1009	36/40/48/56/72W	AC85-265V	CREE/Epistar	90-100LM/W	MW	>80	600*600*10	3 years
QKSMS-PBD-1010	36/40/48/56/72W	AC85-265V	CREE/Epistar	90-100LM/W	MW	>80	300*1200*10	3 years
QKSMS-PBD-1011	56/72W	AC85-265V	CREE/Epistar	90-100LM/W	MW	>80	600*1200*10	3 years



Features of T5&T8 LED tube light:

- . Instant "ON" to 100% brightness
- . Even light distribution
- . Unique diffused lens system
- . No glass or mercury. Polycarbonate tube throughout - making it the safest alternative to fluorescent tube
- . Reduces energy consumption and CO2 emissions by up to 65%.
- . Shortest payback period of any LED tube on the market.
- . Ultra High Power LEDs.
- . Lasts up to 50,000 hours with a 3 year guarantee.

Applications:

Room lighting, house lighting, office lighting, commercial lighting, supermarket lighting, bus interior lighting etc

LED T5 Tube



Technical specifications

Model	Length	Watt	Chip type	LED Brand	PF	Lamp beads	Voltage
T5-30	30CM	5W	SMD2835	Taiwan Epistar	0.9	25PCS	AC85-265V
T5-60	60CM	9W	SMD2835	Taiwan Epistar	0.9	45PCS	AC85-265V
T5-90	90CM	12W	SMD2835	Taiwan Epistar	0.9	60PCS	AC85-265V
T5-120	120CM	18W	SMD2835	Taiwan Epistar	0.9	90PCS	AC85-265V

LED T8 Tube



Technical specifications


Model	Length	Watt	Chip type	LED Brand	PF	Lamp beads	Voltage
T8-30	30CM	5W	SMD2835	Taiwan Epistar	0.9	25PCS	AC85-265V
T8-60	60CM	9W	SMD2835	Taiwan Epistar	0.9	45PCS	AC85-265V
T8-90	90CM	12W	SMD2835	Taiwan Epistar	0.9	60PCS	AC85-265V
T8-120	120CM	18W	SMD2835	Taiwan Epistar	0.9	90PCS	AC85-265V



Model:QKSMS-JPD-701
LED T8



Model:QKSMS-JPD-702
LED T8

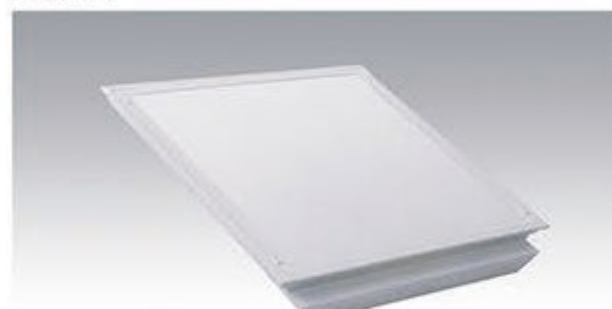


Model:QKSMS-JPD-703
LED T8



Model:QKSMS-JPD-704
LED T8

Model	SIZE	Watt
T8	600*300*75	2x20W
T8	600*600*75	3x20W
T8	600*600*75	4x20W
T8	1200*300*75	2x40W
T8	1200*600*75	3x40W
T8	1200*600*75	4x40W
T5	600*300*50	2x14W

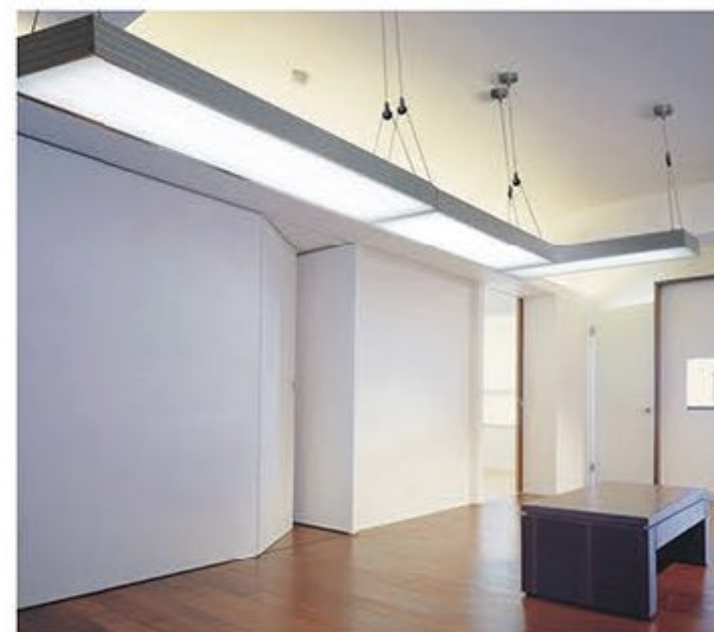

Model:QKSMS-LCD-501
HF001



Model:QKSMS-LCD-502
HF019



Model:QKSMS-LCD-503
HF001



Model:QKSMS-LCD-504
HF003



Model:QKSMS-LCD-505
HF005



Model:QKSMS-LCD-506
HF019


Model	SIZE	Watt
HF001	1200*200*66	2*18WLED
HF001	1200*250*66	3*18WLED 4*18WLED
HF003	1193*77*41	1*18WLED 2*18WLED
HF005	1200*70*80	1*18WLED
HF019	1200*200*70	2*18WLED
HF019	1200*200*55 1200*300*56	2*18WLED 3*18WLED 4*18WLED
HF025	1200*200*80	2*18WLED



Model:QKSMS-GSD-601
LED T8



Model:QKSMS-GSD-602
LED T8

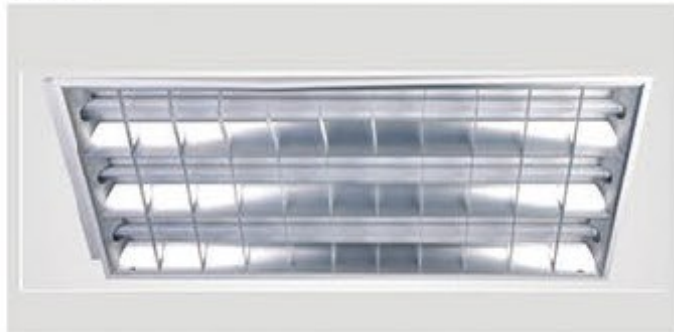

Model:QKSMS-GSD-603
LED T8



Model:QKSMS-GSD-604
LED T8

Model	SIZE	Watt
T8	1200*150*75	1x40W
T8	600*300*75	2x20W
T8	600*600*75	3x20W
T8	600*600*75	4x20W
T8	1200*300*75	2x40W
T8	1200*600*75	3x40W
T8	1200*600*75	3x40W




Model:QKSMS-SFD-801
LED T8



Model:QKSMS-SFD-802
LED T8

Model	Watt	Voltage (V)	LED Chip	Lumen	PF	Size(mm)	Warranty
QKSMS-PBD-1001	1*10W	AC85-265V	OSRAM/Epistar	100-120LM/W	>0.9	660*85*94	3 years
QKSMS-PBD-1002	1*20W	AC85-265V	OSRAM/Epistar	100-120LM/W	>0.9	1270*85*94	3 years
QKSMS-PBD-1002	1*24W	AC85-265V	OSRAM/Epistar	100-120LM/W	>0.9	1570*95*94	3 years
QKSMS-PBD-1003	2*10W	AC85-265V	OSRAM/Epistar	100-120LM/W	>0.9	660*125*94	3 years
QKSMS-PBD-1003	2*20W	AC85-265V	OSRAM/Epistar	100-120LM/W	>0.9	1270*125*94	3 years
QKSMS-PBD-1004	2*24W	AC85-265V	OSRAM/Epistar	100-120LM/W	>0.9	1570*135*94	3 years

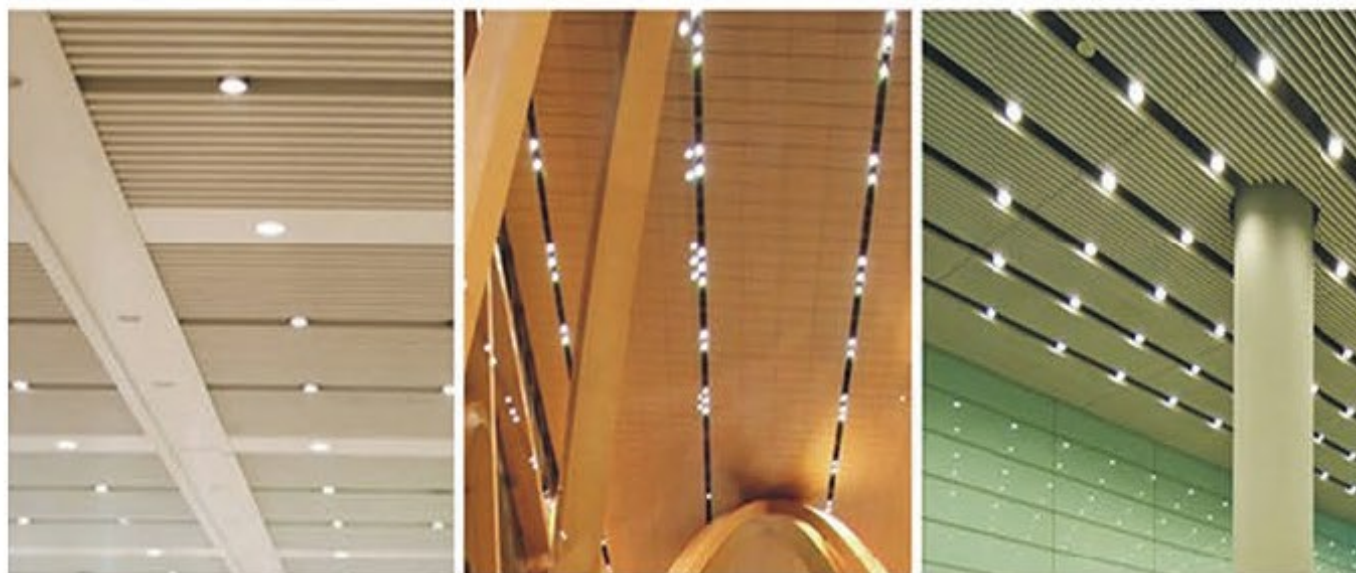

Model:QKSMS-QP-107
Watt: 3W
LED Chip: Epistar
Size: 55xH100mm
Lamp holder: E27/B22
Material:Aluminum



Model:QKSMS-QP-108
Watt: 5W
LED Chip: Epistar
Size: 60xH110mm
Lamp holder: E27/B22
Material:Aluminum



Model:QKSMS-QP-109
Watt: 7W
LED Chip: Epistar
Size: 60xH130mm
Lamp holder: E27/B22
Material:Aluminum



Model:QKSMS-QP-110
Watt: 9W
LED Chip: Epistar
Size: 60xH130mm
Lamp holder: E27/B22
Material:Aluminum



Model:QKSMS-QP-111
Watt: 12W
LED Chip: Epistar
Size: 75xH150mm
Lamp holder: E27/B22
Material:Aluminum



Model:QKSMS-QP-112
Watt: 15W
LED Chip: Epistar
Size: 80xH150mm
Lamp holder: E27/B22
Material:Aluminum



Model:QKSMS-Q-101
Watt: 3W
LED Chip: Epistar
Size: 50xH87mm
Lamp holder: E27/B22
Material:PC+AL



Model:QKSMS-Q-102
Watt: 5W
LED Chip: Epistar
Size: 60xH104mm
Lamp holder: E27/B22
Material:PC+AL



Model:QKSMS-Q-103
Watt: 7W
LED Chip: Epistar
Size: 70xH120mm
Lamp holder: E27/B22
Material:PC+AL



Model:QKSMS-Q-104
Watt: 9W
LED Chip: Epistar
Size: 80xH130mm
Lamp holder: E27/B22
Material:PC+AL



Model:QKSMS-Q-105
Watt: 12W
LED Chip: Epistar
Size: 95xH115mm
Lamp holder: E27/B22
Material:PC+AL



Model:QKSMS-Q-106
Watt: 15-18W
LED Chip: Epistar
Size: 105xH175mm
Lamp holder: E27/B22
Material:PC+AL



LED High Bay Light

Applicatim: factories, warehouse, toll
stabiior, gas station, exhibition hall, super
marhet, stadium, etc.



SMSGKD-01

30W LED Bay Light
Watt:30W
LED chip:Taiwan Epistar
Voltage:AC85-265V
PF>0.9
Lumen:90-100Lm/w
Size:390*450mm



SMSGKD-02

50W LED Bay Light
Watt:50W
LED chip:Taiwan Epistar
Voltage:AC85-265V
PF>0.9
Lumen:90-100Lm/w
Size:450*400mm



SMSGKD-03

80W LED Bay Light
Watt:80W
LED chip:Taiwan Epistar
Voltage:AC85-265V
PF>0.9
Lumen:90-100Lm/w
Size:500*460mm



SMSGKD-04

100W LED Bay Light
Watt:100W
LED chip:Taiwan Epistar
Voltage:AC85-265V
PF>0.9
Lumen:90-100Lm/w
Size:500*460mm



SMSGKD-05

150W LED Bay Light
Watt:150W
LED chip:Taiwan Epistar
Voltage:AC85-265V
PF>0.9
Lumen:90-100Lm/w
Size:500*460mm



SMSGKD-06

200W LED Bay Light
Watt:200W
LED chip:Taiwan Epistar
Voltage:AC85-265V
PF>0.9
Lumen:90-100Lm/w
Size:500*460mm




Product characteristic:
Aluminum lamp body, Anticorrosion surface finished
Tempered glass. Silicone rubber gasket. Waterproof, dustproof.

Application:
Corridor, ladder, parking lot, wall, lane, etc.
IP65




Watt: 3W
Material: Aluminum
Volt: AC220V
Size: 95*95*32MM

Watt: 3W
Material: Aluminum
Volt: AC220V
Size: 95*95*32MM

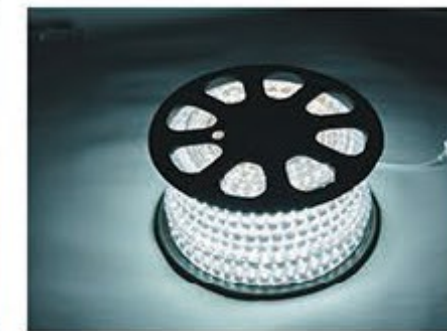

220V SMD 5050-60 STRIP LIGHT

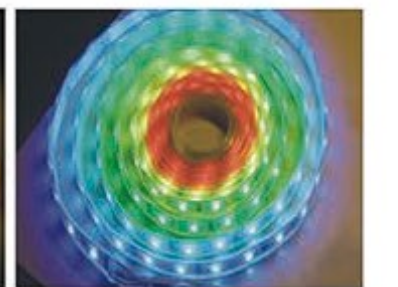

12V SMD 5050-30-60 STRIP LIGHT



Model	Voltage	LED chip	Watt	CCT
QKSMS-DD-3014	DC12V/AC220V	SMD3014	4.8W/7.2W/14.4W	Single color/RGB



Model	Voltage	LED chip	Watt	CCT
QKSMS-DD-5050	DC12V/AC220V	SMD35050	4.8W/7.2W/14.4W	Single color/RGB



Model	Voltage	LED chip	Watt	CCT
QKSMG-DD-3528	DC12V/AC220V	GMD3528	4.8W/7.2W/14.4W	Single color/RGB



Model:QKSMS-ZSD-301



Model:QKSMS-ZSD-302



Model:QKSMS-ZSD-303



Model:QKSMS-ZSD-304



Model:QKSMS-ZSD-305



Model:QKSMS-ZSD-306



Model:QKSMS-ZSD-307



Model:QKSMS-ZSD-308



Model:QKSMS-ZSD-309



Model:QKSMS-ZSD-310



Model:QKSMS-ZSD-311



Model:QKSMS-ZSD-312



Model:QKSMS-ZSD-313



Model:QKSMS-ZSD-314



Model:QKSMS-ZSD-315



Model:QKSMS-ZSD-316

LED HOSES SPOT LAMP SERIES



Model: QKSMS-GTD-401
Size: Ø30mm
LED: 1 x 1W
Color:



Model: QKSMS-GTD-402
Size: Ø49mm
LED: 3x1W
Color:



Model: QKSMS-GTD-403
Size: Ø34mm
LED: 2x1W
Color:



Model: QKSMS-GTD-404
Size: Ø34mm
LED: 1x1W
Color:



Model: QKSMS-GTD-405
Size: Ø41mm
LED: 3x1W
Color:



Model: QKSMS-GTD-406
Size: 23X102X260mm
LED: 4x1W
Color:



Model: QKSMS-GTD-407
Size: 50mm
LED: LED 3x1W
Color:



Model: QKSMS-GTD-408
Size: Ø30mm
LED: LED 1x1/3x1W
Color:



Model: QKSMS-GTD-409
Size: Ø62mm
LED: LED 5x1W
Color:



Model: QKSMS-GTD-410
Size: Ø62mm
LED: 3x1/4x1/5x1W
Color:



Model: QKSMS-GTD-411
Size: Ø50mm
LED: LED 1 x 1/1x3W
Color/Color:



Model: QKSMS-GTD-412
Size: Ø80mm
LED: LED 3x1W
Color:



Model: QKSMS-GTD-413
Size: Ø30mm
LED: LED 1 x 1W
Color:



Model: QKSMS-GTD-414
Size: Ø28mm
LED: LED 1 x 1W
Color:



Model: QKSMS-GTD-415
Size: 25mm
LED: 3W
Color:

Model: QKSMS-GTD-416
Size: 25mm
LED: 3W
Color:

Model: QKSMS-GTD-417
Size: Ø65mm
LED: 3W
Color:

Model: QKSMS-GTD-418
Size: Ø65mm
LED: 3W
Color:

Model: QKSMS-GTD-419
Size: Ø26mm
LED: 1W
Color:



LED Flood Light

Performance features

The entire light is made of high quality aluminum alloy and toughened glass.
Self-made special reflector panel to ensure dust-resistance, water resistance
and anti-explosion. Long lifetime, lower consumption, good dissipation, high light efficiency.

Suitable places

tunnel, market exhibition hall, parking space, athletic field, sign, park, sculpture and national
green lighting engineering, and so on.



Model: QKSMS-TGD-1101

30W flood light

30W Flood Light

Bridgelux LED chip


PF>0.9 120lm/W

Size: 96*42*35mm

Whole lamp passes EMC test.

Die casting aluminum lamp body

304 stainless steel ring; Tempered glass

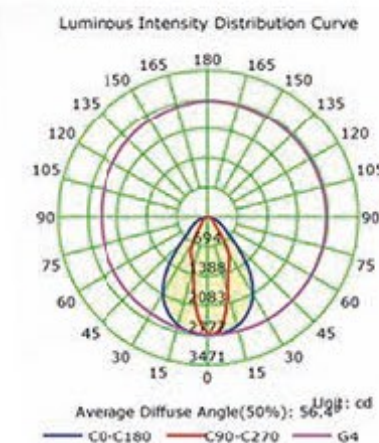

Perfect details



10W QKSMS-TGD-1107 20W QKSMS-TGD-1108 30W QKSMS-TGD-1109 50W QKSMS-TGD-1110 70-100W QKSMS-TGD-1111 100W QKSMS-TGD-1112

Watt: 10W, 20W, 30W, 50W, 70W, 100W
 Volt: AC85-265V 50/60HZ, 12V/24V
 LED Chip: Epistar, Bridgelux, CREE
 PF>0.9
 CCT: W/WW/CW/RGB/Single color
 IP Rate: IP65
 Material: Die casting aluminum+ tempered glass
 Working temperature: -25-60°
 Warranty: 3 Years.




Perfect details



100W QKSMS-TGD-1113 150W QKSMS-TGD-1114 200W QKSMS-TGD-1115 250W QKSMS-TGD-1116 300W QKSMS-TGD-1117

Watt: 100W, 150W, 200W, 250W, 300W
 Volt: AC85-265V 50/60HZ, 12V/24V
 LED Chip: Epistar, Bridgelux, CREE
 PF>0.9
 CCT: W/WW/CW/RGB/Single color
 IP Rate: IP65
 Material: Die casting aluminum+ tempered glass
 Working temperature: -25-60°
 Warranty: 3 Years.

Luminous Intensity Distribution Curve

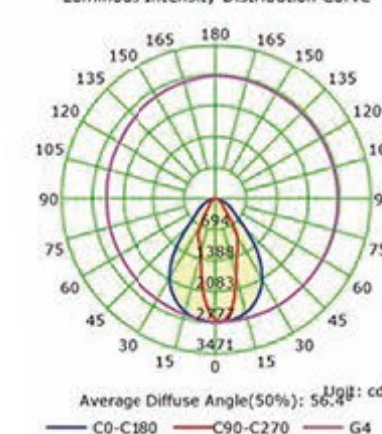

Perfect details



100W
QKSMS-TGD-1118



150W
QKSMS-TGD-1119




200W
QKSMS-TGD-1120



250W
QKSMS-TGD-1121

Watt: 100W, 150W, 200W, 250W
Volt: AC85-265V 50/60HZ, 12V/24V
LED Chip: Epistar, Bridgelux, CREE
PF>0.9
CCT: W/WW/CW/RGB/Single color
IP Rate: IP65
Material: Die casting aluminum+ tempered glass
Working temperature: -25-60°
Warranty: 3 Years.

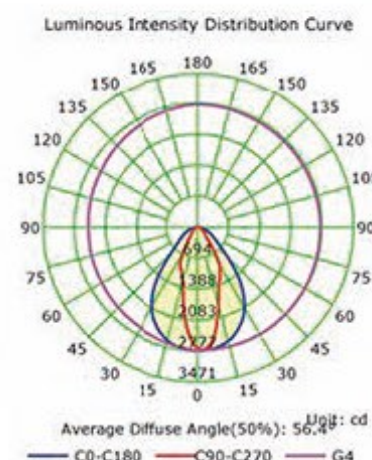

Perfect details



10W
QKSMS-TGD-1122



20W
QKSMS-TGD-1123




30W
QKSMS-TGD-1124



50W
QKSMS-TGD-1125

Watt: 10W, 20W, 30W, 50W
Volt: AC85-265V 50/60HZ, 12V/24V
LED Chip: Epistar, Bridgelux, CREE
PF>0.9
CCT: W/WW/CW/RGB/Single color
IP Rate: IP65
Material: Die casting aluminum+ tempered glass
Working temperature: -25-60°
Warranty: 3 Years.

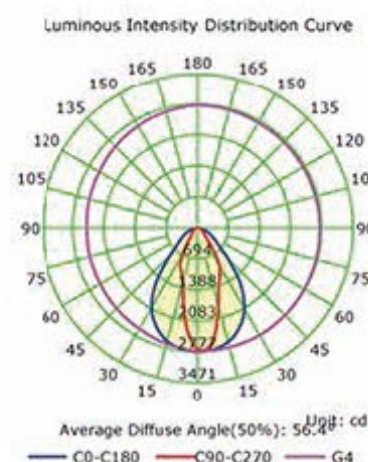


Perfect details




10W QKSMS-TGD-1126 20W QKSMS-TGD-1127 30W QKSMS-TGD-1128 50W QKSMS-TGD-1129 70W QKSMS-TGD-1130 100W QKSMS-TGD-1131

Watt: 10W, 20W, 30W, 50W, 70W, 100W
 Volt: AC85-265V 50/60HZ, 12V/24V
 LED Chip: Epistar, Bridgelux, CREE
 PF > 0.9
 CCT: W/WW/CW/RGB/Single color
 IP Rate: IP65
 Material: Die casting aluminum + tempered glass
 Working temperature: -25-60°
 Warranty: 3 Years.

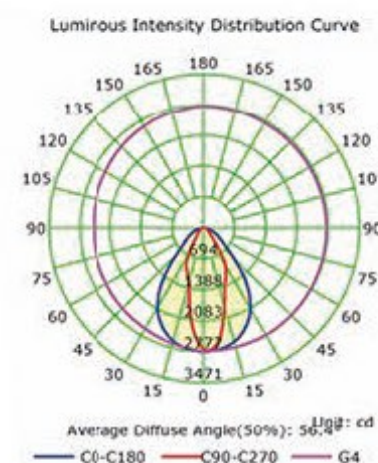


Perfect details



30W QKSMS-TGD-1132 50W QKSMS-TGD-1133 70W QKSMS-TGD-1134 100W QKSMS-TGD-1135

Watt: 30W, 50W, 70W, 100W
 Volt: AC85-265V 50/60HZ, 12V/24V
 LED Chip: Epistar, Bridgelux, CREE
 PF > 0.9
 CCT: W/WW/CW/RGB/Single color
 IP Rate: IP65
 Material: Die casting aluminum + tempered glass
 Working temperature: -25-60°
 Warranty: 3 Years.

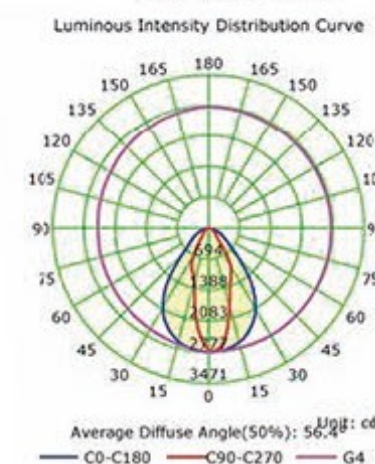

Perfect details




30W
QKSMS-TGD-1137

50W
QKSMS-TGD-1138

100W
QKSMS-TGD-1139

150W
QKSMS-TGD-1140

Watt: 30W, 50W, 100W, 150W
Volt: AC85-265V 50/60HZ, 12V/24V
LED Chip: Epistar, Bridgelux, CREE
PF>0.9
CCT: W/WW/CW/RGB/Single color
IP Rate: IP65
Material: Die casting aluminum+ tempered glass
Working temperature: -25-60°
Warranty: 3 Years.

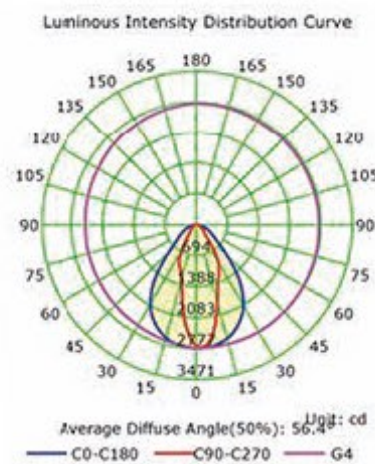

Perfect details



50W
QKSMS-TGD-1141


100W
QKSMS-TGD-1142

150W
QKSMS-TGD-1143

250W
QKSMS-TGD-1144

300W
QKSMS-TGD-1145

Watt: 50W, 100W, 150W, 250W, 300W
Volt: AC85-265V 50/60HZ, 12V/24V
LED Chip: Epistar, Bridgelux, CREE
PF>0.9
CCT: W/WW/CW/RGB/Single color
IP Rate: IP65
Material: Die casting aluminum+ tempered glass
Working temperature: -25-60°
Warranty: 3 Years.

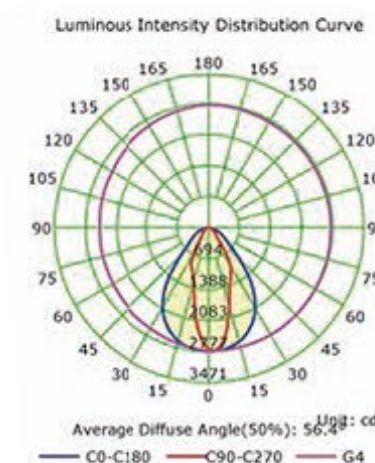

Perfect details



50W
QKSMS-TGD-1146




100W
QKSMS-TGD-1147



150W
QKSMS-TGD-1148

Watt: 50W, 100W, 150W
Volt: AC85-265V 50/60HZ, 12V/24V
LED Chip: Epistar, Bridgelux, CREE
PF > 0.9
CCT: W/WW/CW/RGB/Single color
IP Rate: IP65
Material: Die casting aluminum + tempered glass
Working temperature: -25-60°
Warranty: 3 Years.

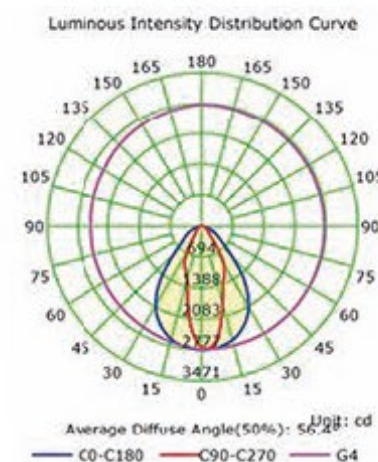

Perfect details



6W
QKSMS-TGD-1149



12W/18W
QKSMS-TGD-1150



20W/24W
QKSMS-TGD-1151




36W
QKSMS-TGD-1152



120W
QKSMS-TGD-1153

Watt: 6W, 12W/18W, 20W/24W, 36W, 120W
Volt: AC85-265V 50/60HZ, 12V/24V
LED Chip: Epistar, Bridgelux, CREE
PF > 0.9
CCT: W/WW/CW/RGB/Single color
IP Rate: IP65
Material: Die casting aluminum + tempered glass
Working temperature: -25-60°
Warranty: 3 Years.

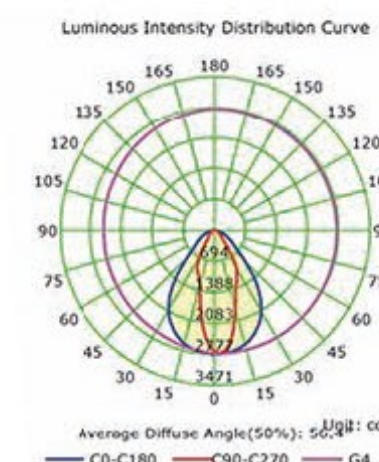

Perfect details



COB10W
QKSMS-TGD-1161



COB20W
QKSMS-TGD-1162



30W
QKSMS-TGD-1163




COB30W
QKSMS-TGD-1164



COB50W
QKSMS-TGD-1165

Watt: COB10W, COB10W, 30W, COB30W, COB50W
Volt: AC85-265V 50/60HZ, 12V/24V
LED Chip: Epistar, Bridgelux, CREE
PF>0.9
CCT: W/WW/CW/RGB/Single color
IP Rate: IP65
Material: Die casting aluminum+ tempered glass
Working temperature: -25-60°
Warranty: 3 Years.

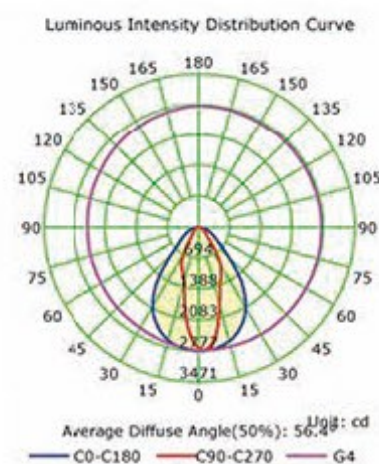

Perfect details



3W
QKSMS-TGD-1166



5W
QKSMS-TGD-1167




10W
QKSMS-TGD-1169



15W
QKSMS-TGD-1170


Watt: 3W, 5W, 3W, 10W, 15W, 6-9W, 5-7W
Volt: AC85-265V 50/60HZ, 12V/24V
LED Chip: Epistar, Bridgelux, CREE
PF>0.9
CCT: W/WW/CW/RGB/Single color
IP Rate: IP65
Material: Die casting aluminum+ tempered glass
Working temperature: -25-60°
Warranty: 3 Years.

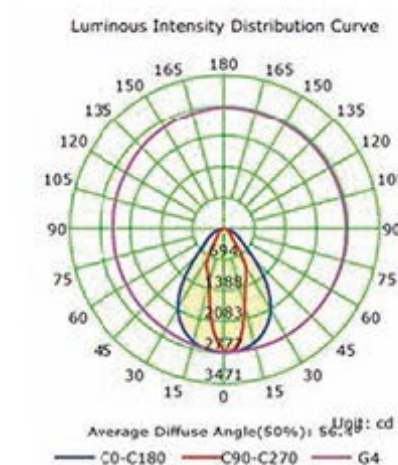

Perfect details




Watt: 3W, 5W, 9W, 12W, 18W, 36W
 Volt: AC85-265V 50/60HZ, 12V/24V
 LED Chip: Epistar, Bridgelux, CREE
 PF>0.9
 CCT: W/WW/CW/RGB/Single color
 IP Rate: IP65
 Material: Die casting aluminum+ tempered glass
 Working temperature: -25-60°
 Warranty: 3 Years.

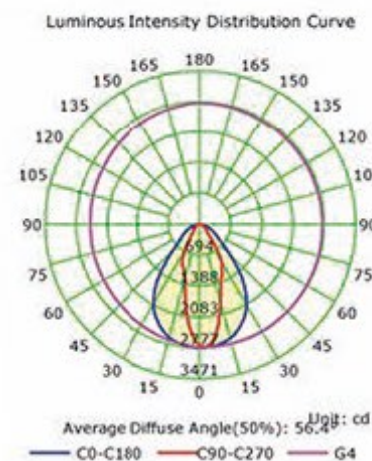

Perfect details



Watt: 2*10W, 2*10W, COB30W, 3*10W, SND40W
 Volt: AC85-265V 50/60HZ, 12V/24V
 LED Chip: Epistar, Bridgelux, CREE
 PF>0.9
 CCT: W/WW/CW/RGB/Single color
 IP Rate: IP65
 Material: Die casting aluminum+ tempered glass
 Working temperature: -25-60°
 Warranty: 3 Years.

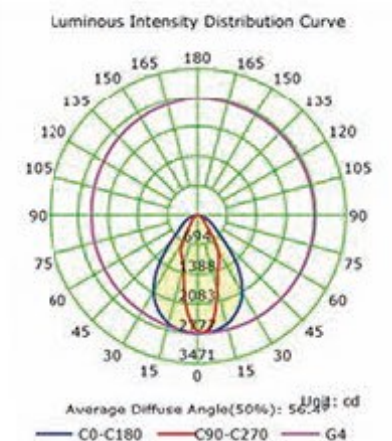



Product features:

1. Aluminum die-casting, stainless steel cover, silicone rubber seals;
2. Imported light source that could ensure high-brightness, monochrome or full color effect;
3. 350mA constant current drive power, epoxy resin sealed circuit board, stable performance, excellent protection;
4. Recommend to use low safety voltage, the working life over 50,000 hours

Perfect details



Model	Watt	Voltage	CCT	LED Chip	IP	Size
QKSMS-DMD-1305	1W	AC85-265V	R/Y/B/G/W/WW/RGB	Epistar/Bridgelux	IP65	L90xW90xH60mm
QKSMS-DMD-1306	4W	AC85-265V	R/Y/B/G/W/WW/RGB	Epistar/Bridgelux	IP65	L100xW100xH70mm
QKSMS-DMD-1307	5W	AC85-265V	R/Y/B/G/W/WW/RGB	Epistar/Bridgelux	IP65	L120xW120xH70mm
QKSMS-DMD-1308	9W	AC85-265V	R/Y/B/G/W/WW/RGB	Epistar/Bridgelux	IP65	L150xW150xH70mm

Perfect details



10W



20W



30W



50W

Model	Watt	Voltage	CCT	LED Chip	IP	Size
QKSMS-DMD-1309	10W	AC85-265V	R/Y/B/G/W/WW/RGB	Epistar/Bridgelux	IP65	φ150xH115mm
QKSMS-DMD-1310	20W	AC85-265V	R/Y/B/G/W/WW/RGB	Epistar/Bridgelux	IP65	φ180xH110mm
QKSMS-DMD-1311	30W	AC85-265V	R/Y/B/G/W/WW/RGB	Epistar/Bridgelux	IP65	φ200xH105mm
QKSMS-DMD-1312	50W	AC85-265V	R/Y/B/G/W/WW/RGB	Epistar/Bridgelux	IP65	φ300xH90mm



MOEL:QKSMS-DMD-1314
Size: φ52xH80mm
Power:1W



MOEL:QKSMS-DMD-1315
Size: φ78xH70mm
Power:3W



MOEL:QKSMS-DMD-1316
Size: φ90xH80mm
Power:1-3W



MOEL:QKSMS-DMD-1317
Size: φ100xH80mm
Power:3W



MOEL:QKSMS-DMD-1318
Size: φ88xH115mm
Power:1W



MOEL:QKSMS-DMD-1319
Size: φ110xH135mm
Power:3W



MOEL:QKSMS-DMD-1320
Size: φ110xH135mm
Power:3W



MOEL:QKSMS-DMD-1321
Size: φ110xH135mm
Power:3W



MOEL:QKSMS-DMD-1322
Size: φ150/160xH90mm
Power:3-7W



MOEL:QKSMS-DMD-1323
Size: φ170xH110mm
Power:3W



MOEL:QKSMS-DMD-1324
Size: φ250xH125mm
Power:18-24W



MOEL:QKSMS-DMD-1325
Size: φ200xH130mm
Power:12-18W

Perfect details



3W



5W



6W



9W



18W

Model	Watt	Voltage	CCT	LED Chip	IP	Size
QKSMS-DMD-1326	3W	AC85-265V	R/Y/B/G/W/WW/RGB	Epistar/Bridgelux	IP65	L230xW65xH45mm
QKSMS-DMD-1327	5W	AC85-265V	R/Y/B/G/W/WW/RGB	Epistar/Bridgelux	IP65	L325xW65xH65mm
QKSMS-DMD-1328	6W	AC85-265V	R/Y/B/G/W/WW/RGB	Epistar/Bridgelux	IP65	L325xW65xH65mm
QKSMS-DMD-1329	9W	AC85-265V	R/Y/B/G/W/WW/RGB	Epistar/Bridgelux	IP65	L355xW90xH80mm



Product features:

Does the LED light source adopts imported high brightness chip, the luminous efficiency is more than 100 lm/W, color coefficient of Ra is greater than 75;
Does lamps shell adopts the high thermal conductivity of stainless steel or aluminum alloy material, players glass pervious to light cover, riot, dustproof and waterproof design effectively;
Does use ac wide voltage power supply, voltage constant current drive power, power factor above 0.95, power efficiency is above 92%;
Does the LED light source is optional colors: red, green, yellow, blue, white, warm white, single seven color full color, optional light Angle in 15° ~ 120° .
Beautiful appearance generous, green, environmental protection, can be in to 50° C ~ 40° C temperature under normal use

Perfect details



Model	Watt	Voltage	CCT	LED Chip	IP	Size
QKSMS-SDD-1501	6W	AC12/24V	R/Y/B/G/W/WW/RGB	Epistar / Bridgelux	IP68	Φ130xH85 mm
QKSMS-SDD-1502	9W	AC12/24V	R/Y/B/G/W/WW/RGB	Epistar / Bridgelux	IP68	Φ160xH85 mm
QKSMS-SDD-1503	12W	AC12/24V	R/Y/B/G/W/WW/RGB	Epistar / Bridgelux	IP68	Φ180xH85 mm
QKSMS-SDD-1504	18W	AC12/24V	R/Y/B/G/W/WW/RGB	Epistar / Bridgelux	IP68	Φ200xH85 mm

Perfect details



Model	Watt	Voltage	CCT	LED Chip	IP	Size
QKSMS-SDD-1505	1W	AC12/24V	R/Y/B/G/W/WW/RGB	Epistar / Bridgelux	IP68	Φ70xH95 mm
QKSMS-SDD-1506	3W	AC12/24V	R/Y/B/G/W/WW/RGB	Epistar / Bridgelux	IP68	Φ80xH120mm
QKSMS-SDD-1507	5W	AC12/24V	R/Y/B/G/W/WW/RGB	Epistar / Bridgelux	IP68	Φ100xH140 mm
QKSMS-SDD-1508	6W	AC12/24V	R/Y/B/G/W/WW/RGB	Epistar / Bridgelux	IP68	Φ120xH140 mm



Model: QKSMS-CDD-1601
voltage: AC24V/220V
Power: 3X1W
Material: aluminum die casting
Size: 100X110X280mm



Model: QKSMS-CDD-1602
voltage: AC24V/220V
Power: 3X1W
Material: aluminum die casting
Size: 80X93X320mm



Model: QKSMS-CDD-1603
voltage: AC24V/220V
Power: 3X1W
Material: aluminum die casting
Size: 100X150X280mm



Model: QKSMS-CDD-1604
voltage: AC24V/220V
Power: 7X1W
Material: aluminum die casting
Size: 105X150X450mm



Model: QKSMS-CDD-1605
voltage: AC24V/220V
Power: 7X1W
Material: aluminum die casting
Size: 105X150X450mm



Model: QKSMS-CDD-1606
voltage: AC24V/220V
Power: 9X1W
Material: aluminum die casting
Size: 158X210X280mm



Model: QKSMS-CDD-1607
voltage: AC24V/220V
Power: 3W
Material: aluminum die casting
Size: 60mm



Model: QKSMS-CDD-1608
voltage: AC24V/220V
Power: 3W
Material: aluminum die casting
Size: 60mm



Model: QKSMS-CDD-1605
voltage: AC24V/220V
Power: 5-6W Mr16
Material: aluminum die casting
Size: $\Phi 103 \times 450$ mm



Model: QKSMS-CDD-1606
voltage: AC24V/220V
Power: 5-6W Mr16
Material: aluminum die casting
Size: $\Phi 103 \times 450$ mm



Model: QKSMS-CDD-1607
voltage: AC24V/220V
Power: 3W
Material: aluminum die casting
Size: $\Phi 60$ mm



Model: QKSMS-CDD-1608
voltage: AC24V/220V
Power: 3W
Material: aluminum die casting
Size: $\Phi 60$ mm



Model: QKSMS-CDD-1609
voltage: AC24V/220V
Power: 5-7W/9-12W
Material: aluminum die casting
Size: $\Phi 115 \times 140$ mm/ $\Phi 145 \times 160$ mm



Model: QKSMS-CDD-1610
voltage: AC24V/220V
Power: 6-12W
Material: aluminum die casting
Size: $\Phi 145 \times 320$ / $\Phi 145 \times 450$



Model: QKSMS-BD-1711
voltage: 100V-240V-50/60HZ
Power: 20W
Material: aluminum die casting body
Size: 110*300mm



Model: QKSMS-BD-1712
voltage: 100V-240V-50/60HZ
Power: 20W
Material: aluminum die casting body
Size: 110*300mm



Model: QKSMS-BD-1713
voltage: 100V-240V-50/60HZ
Power: 10W
Material: aluminum die casting body
Size: 110*200mm



Model: QKSMS-BD-1714
voltage: 100V-240V-50/60HZ
Power: 10W
Material: aluminum die casting body
Size: 110*200mm



Model: QKSMS-BD-1715
Voltage: 100V-240V-50/60HZ
Material: aluminum die casting body
The light source: E27
Size: Φ90x90xH260mm
Φ120x120xH300mm
Φ150x150xH420mm



Model: QKSMS-BD-1716
Voltage: 100V-240V-50/60HZ
Material: aluminum die casting body
The light source: E27
Size: Φ140xH410mm
Φ180xH420mm
Φ200xH420mm



Model: QKSM-BD1701
Watt: 3*1W
Material: Aluminum die casting
Size: 160*90mm




Model: QKSM-BD1702
Watt: 3*1W
Material: Aluminum die casting
Size: 160*90mm



Model: QKSM-BD1703
Watt: 3*1W
Material: Aluminum die casting
Size: 130*54*270mm



Model: QKSM-BD1704
Watt: 3*1W
Material: Aluminum die casting
Size: 260*54*130mm



Model: QKSM-BD1705
Watt: 4*1W
Material: Aluminum die casting
Size: 205*206*73mm



Model: QKSM-BD1706
Watt: 6*1W
Material: Aluminum die casting
Size: 150*113*90mm



Model: QKSM-BD1705
Watt: 3*1W
Material: Aluminum die casting
Size: 268*92*81mm



Model: QKSM-BD1706
Watt: 6*1W
Material: Aluminum die casting
Size: 68*92*150mm



Model: QKSM-BD1707
Watt: 3*1W
Material: Aluminum die casting
Size: 160*90*160mm




Model: QKSM-BD1708
Watt: 3*1W
Material: Aluminum die casting
Size: 85*85*85mm



Model	Watt	voltage	CCT	LED Chip	IP	size
QKSMS-XQD-1403	18/24/36W	AC85-265V/24V	R/Y/B/G/W/WW/RGB	Epistar/ Bridgelux	IP65	L1000xW50xH55mm
QKSMS-XQD-1404	18/24/36W	AC85-265V/24V	R/Y/B/G/W/WW/RGB	Epistar/ Bridgelux	IP65	L1000xW62xH63mm
QKSMS-XQD-1405	18/24/36W	AC85-265V/24V	R/Y/B/G/W/WW/RGB	Epistar/ Bridgelux	IP65	L1000xW60xH70mm



Model	Watt	voltage	CCT	LED Chip	IP	size
QKSMS-XQD-1406	18/24/36W	AC85-265V/24V	R/Y/B/G/W/WW/RGB	Epistar/ Bridgelux	IP65	L1000xW60xH45mm
QKSMS-XQD-1407	18/24/36W	AC85-265V/24V	R/Y/B/G/W/WW/RGB	Epistar/ Bridgelux	IP65	L1000xW44xH55mm
QKSMS-XQD-1408	18/24/36W	AC85-265V/24V	R/Y/B/G/W/WW/RGB	Epistar/ Bridgelux	IP65	L1000xW55xH55mm

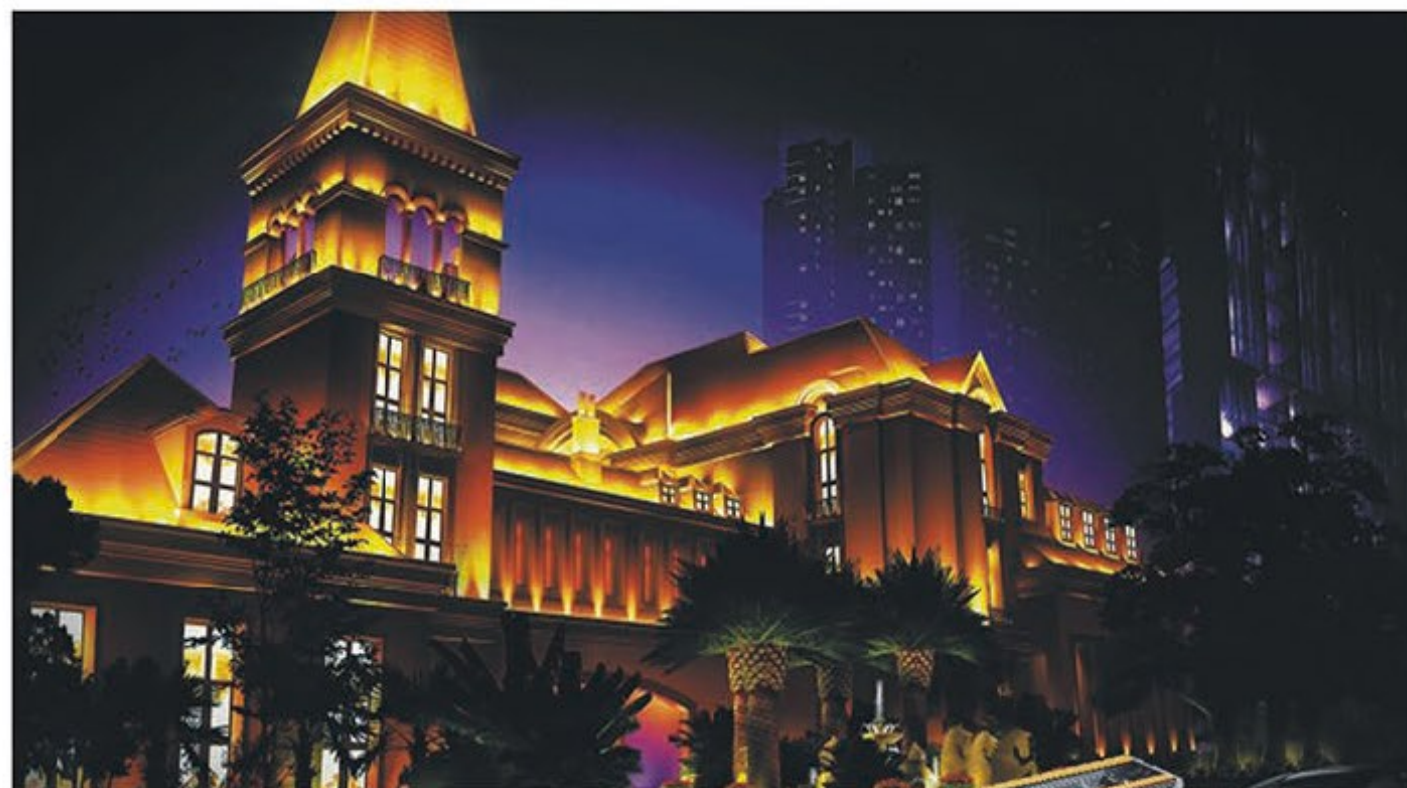

Model	Watt	voltage	CCT	LED Chip	IP	PF	size
QKSMS-XQD-1409	18/24/36W	AC85-265V/24V	R/Y/B/G/W/WW/RGB	Epistar/ Bridgelux	IP65	PF>0.9	L1000xW40xH50mm
QKSMS-XQD-1410	18/24/36W	AC85-265V/24V	R/Y/B/G/W/WW/RGB	Epistar/ Bridgelux	IP65	PF>0.9	L1000xW30xH40mm



Model	Watt	voltage	CCT	LED Chip	IP	size
QKSMS-XQD-1411	18/24/36W	AC85-265V/24V	R/Y/E/G/W/WW/RGB	Epistar/ Bridgelux	IP65	L1000xW60xH45mm
QKSMS-XQD-1412	18/24/36W	AC85-265V/24V	R/Y/E/G/W/WW/RGB	Epistar/ Bridgelux	IP65	L1000xW44xH55mm
QKSMS-XQD-1413	18/24/36W	AC85-265V/24V	R/Y/E/G/W/WW/RGB	Epistar/ Bridgelux	IP65	L1000xW55xH55mm



Model	Watt	voltage	CCT	LED Chip	IP	size
QKSMS-XQD-1401	18/24W	AC85-265V/24V	R/Y/B/G/W/WW/RGB	Epistar/ Bridgelux	IP65	L1000xW46xH46mm
QKSMS-XQD-1402	18/24/36W	AC85-265V/24V	R/Y/B/G/W/WW/RGB	Epistar/ Bridgelux	IP65	L1000xW53xH70mm

- Light material made of aluminium alloy by high pressure die casting. Strong corrosion resistance. Good heat dissipation performance.
- Reflector material made of high purity aluminum treatment by anodic oxidation. High reflectivity, low light attenuation.
- Surface electrostatic spray treatment, good corrosion resistance, beautiful and generous
- Professional design of the optical series so that the distribution of light to achieve the best, high output light
- Protective cover high strength engineering plastic, high light transmittance, high strength protection
- European style, simple and generous, rich and complete products, suitable for use in different places



- | | | | | | | | |
|--|--|---|---|---|---|---|---|
| Model: QKSMS
CPD-601
Size: Φ90 H600mm
Bulb: E27 | Model: QKSMS
CPD-602
Size: Φ90 H600mm
Bulb: E27 | Model: QKSMS
CPD-603
Size: Φ110 H600mm
Bulb: E27 | Model: QKSMS
CPD-604
Size: Φ110 H600mm
Bulb: E27 | Model: QKSMS
CPD-605
Size: Φ110 H600mm
Bulb: E27 | Model: QKSMS
CPD-606
Size: Φ145 H800mm
Bulb: E27 | Model: QKSMS
CPD-607
Size: Φ145 H800mm
Bulb: E27 | Model: QKSMS
CPD-608
Size: Φ145 H800mm
Bulb: E27 |
|--|--|---|---|---|---|---|---|



- | | | | | | | | |
|---|---|---|---|---|---|---|---|
| Model: QKSMS
CPD-609
Size: Φ110 H600mm
Bulb: E27 | Model: QKSMS
CPD-610
Size: Φ110 H600mm
Bulb: E27 | Model: QKSMS
CPD-611
Size: Φ110 H600mm
Bulb: E27 | Model: QKSMS
CPD-612
Size: Φ110 H600mm
Bulb: E27 | Model: QKSMS
CPD-613
Size: 165X65 H600mm
Bulb: E27 | Model: QKSMS
CPD-614
Size: 165X55 H600mm
Bulb: E27 | Model: QKSMS
CPD-615
Size: Φ145 H800mm
Bulb: E27 | Model: QKSMS
CPD-616
Size: Φ145 H800mm
Bulb: E27 |
|---|---|---|---|---|---|---|---|